



Player One

Apollo-M MAX Pro Camera Manual

V1.0

Dec, 2024

Table of Contents

Product Features	3
Technical parameters	4
Product Description	5
Format.....	5
Pixel size.....	6
Cutting-edge Design	6
Front 3P and Rear 4P tilter plate	6
Carbon fiber and light weight.....	7
Deep Cooling	8
Anti-Dew heater	8
Full well.....	9
HCG and Noise	9
Amp-Glow performance.....	10
512MB DDR3 Cache	10
Type-C Data port and Power port.....	11
Standard Cable Usage.....	11
Cooling System and Anti-Dew Heater	12
Overvoltage and overcurrent protection mechanism.....	12
Performance	13
Readout Noise.....	14
Dark current.....	14
Relative QE Curve	14
Mechanical Drawing	15
BFL Solutions	16
Package List.....	18
Warranty & Shipping Policy.....	19

Product Features

DSO cooled camera line is the most advanced product line in Player One history. We start the project from 2021, through a lot of modify and rebuild we made this final version. It brings our newest technology and design to everyone, we are very proud to introduce this camera line.



Sony IMX432 Mono
Global shutter Sensor

1.1"
1.7 Mega Pixels

12bit
ADC bit depth

126FPS
1608 × 1104

79%
QE Peak

2.6e
Readout Noise

100Ke
Full Well

Front 3P+Rear 4P
Alternative Sensor Tilt Plate

512MB
DDR3 buffer

Anti Dew
Adjustable Dew Heater

Delta-T 40c
Deep Cooling

Type-C
USB3.0 port

BFL Solution
Complete Imaging Train Solutions

Real cooled camera for professional Solar imaging


After we released ACS (active cooling system) for solar/planetary cameras, a lot of solar astrophotographers asked if we could add a peltier unit. Now we made a more advanced solar camera with full function cooling system. Based on Player One's technology, Apollo-M MAX Pro has 100Ke full well and it can run 126fps under full resolution. With high quality 2 Stage TEC unit, Apollo-M MAX Pro camera can cooling down 35-40 °C below the ambient in long exposure mode, and 30 °C below ambient in video mode.

Technical parameters

Sensor	New SONY IMX432 1.1" CMOS (mono)
Diagonal	17.5mm
Total Pixels	1.7 Mega Pixels
Max Resolution	1608x1104
Pixel Size	9μm
Chip Size	14.5mmx9.9mm
Frame Rate	126FPS (12bit)
Shutter	Global shutter
Exposure Range	32μs-2000s
Readout Noise	22.9e~2.6e
Full Well	100k e
QE Peak	≈79%
ADC	12 bit
Cooling System	High quality 2 stage TEC cooling Component
Cooler Power Consumption	12V – 3A Max
Delta T	35°C-40°C (below ambient)
Working Temperature and Humidity	Working Temperature: -10°C—60°C Working Relative Humidity: 0%—80%
Protective Window	D32*2MM High Quality AR Plus (Anti Reflection) Multi-Layer Coating
Data Port	USB3.0/USB2.0
Adapter	1.25" / M42X0.75
Back Focal Length	17.5mm
Diameter	78mm
Weight	420g
Resolution and FPS	Under USB3.0 mode Resolution 12bit ADC 1608x1104 126FPS More resolution options could be setup in capture software!

Product Description

Apollo-M MAX Pro (IMX432) camera is developed by Player One Astronomy, a real cooled camera for solar imaging. Apollo-M MAX Pro camera, which adopts **Sony IMX432 1.1" format** monochrome sensor. The **9um pixel size** accommodates a well depth of **100Ke** with a total of **1.7MP** (the resolution is 1608*1104), and the diagonal is **17.5mm**.

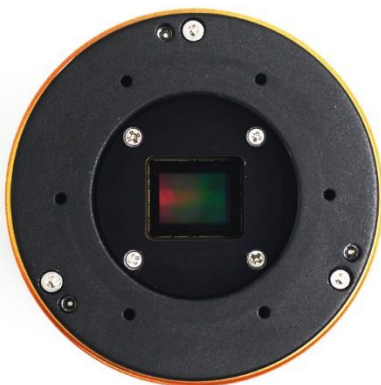


Pregius Technology

Apollo-M MAX Pro (IMX432) based on **Sony Pregius 3rd Gen technology**, it is global shutter technology used in CMOS sensors.


Format

Apollo-M MAX Pro (IMX432) has 1.1"format, it is the biggest sensor in entire solar camera series currently, this size is quite big for imaging.

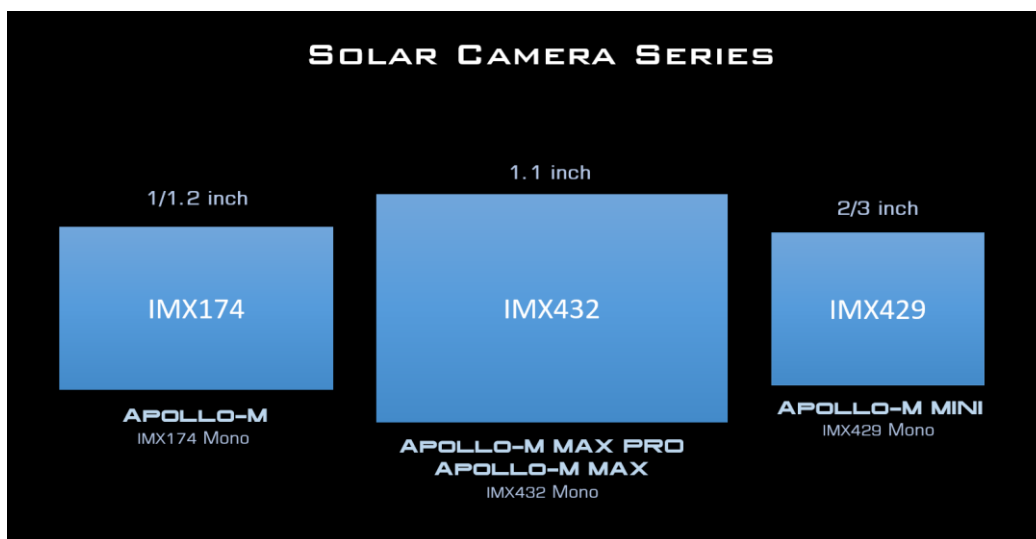

Pixel size

9um pixel size is 1.5 times bigger than IMX174 camera, which means it can works at longer focal ratio, such as SCT + Daystar filter (with 4.2X).

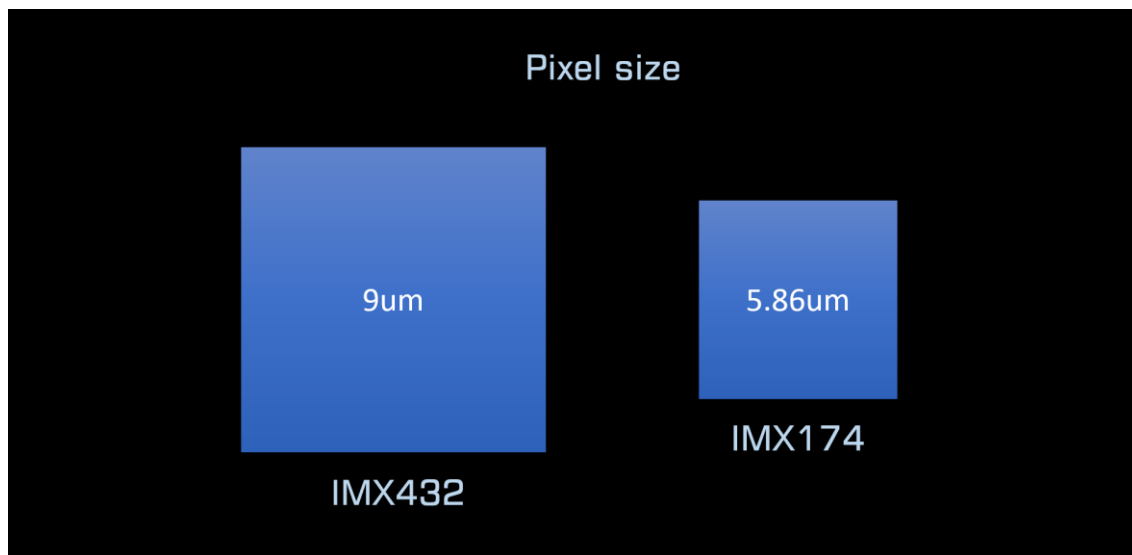

Cutting-edge Design

The Apollo-M MAX Pro cooled camera using same design as Ares cooled series, but a little difference! With a round body, a golden and black color scheme, and using carbon fiber to keep weight down and cutting-edge outlook. We also integrated the sensor tilter plate and anti-dew PCB board. This series of designs makes the camera not only light and cool, but also functional!



Front 3P and Rear 4P tilter plate

When shooting deep sky objects, the sensor tilt plate can be used to adjust the sensor tilt angle to make the stars at the corners more rounded. Apollo-M MAX Pro camera provide both front and Rear tilter plate fulfill all usage scenarios.


Front 3P sensor tilter plate

For basic connection



Rear 4P sensor tilter plate

To connect Phoenix Wheel, Filter Drawer and OAG with fixed angel

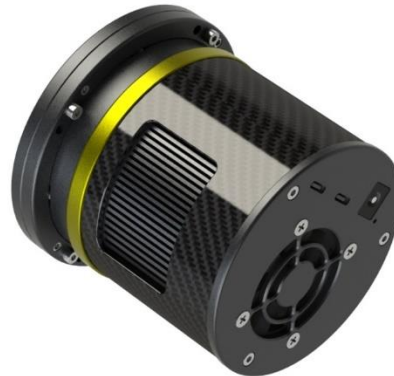

Front 3P tilter plate is the default part on camera, we believe most users has experience with this before. it works well in a lot of basic scenarios.

Rear 4P tilter plate is an alternate part for camera, when use filter wheel/filter drawer and OAG with fixed angel, it is necessary. And it is also convenient for RASA users to adjust the sensor tilt angel.

The built-in high-density sponge shading pad can block the light from the side slits without any side leakage.


Carbon fiber and light weight

The Apollo-M MAX Pro uses a carbon fiber in camera housing and has been optimized for weight reduction in its structural design. The camera weighs only 420 grams, making it one of the lightest models on the market.




Deep Cooling

Player One cooled camera series use 2 Stage TEC Cooling unit, after improved the structure design to reject the heat back to camera chamber, Camera **Delta-T** can reach **35-40°C**.

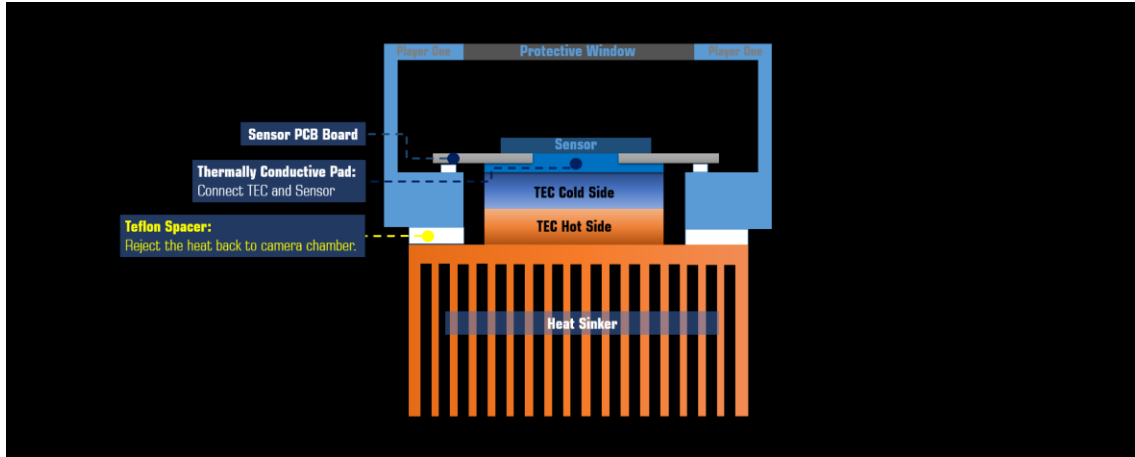


Anti-Dew heater

In the design of lightweight cooled cameras, Player One still pursuing the perfection, any necessary features must have, especially anti-dew system, is the problem that a lot of small cooled cameras ignored.

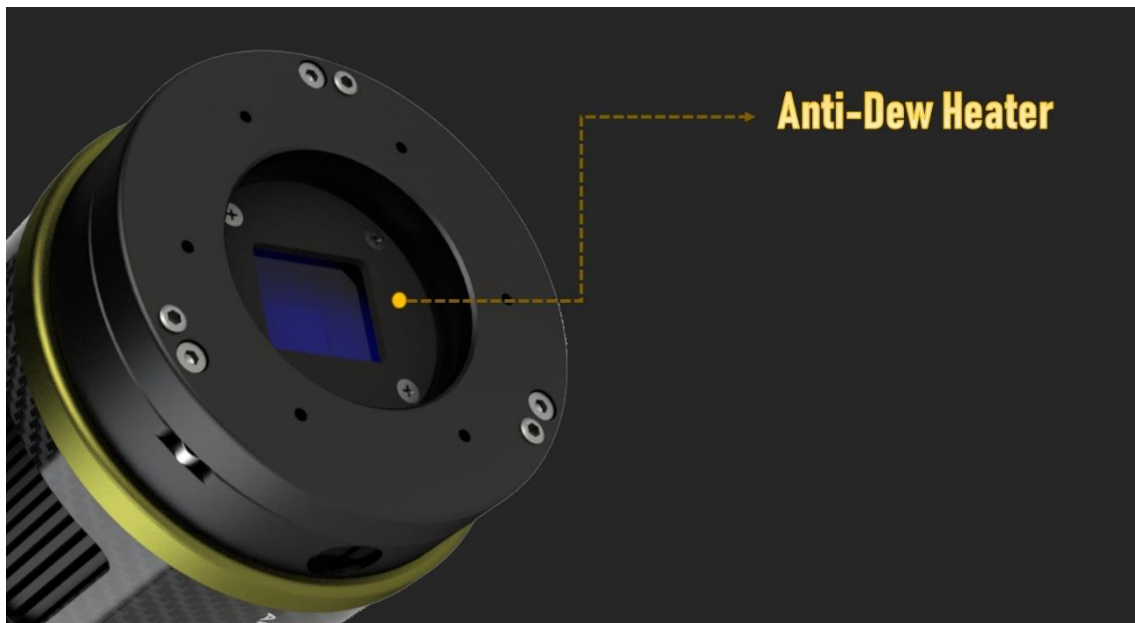

Full well


100Ke full well, is 3 times bigger than IMX174. This feature will bring some new possibility in imaging. What we can imagine is HDR the Sun and prominence, or maybe the bright and dark side of the Moon.

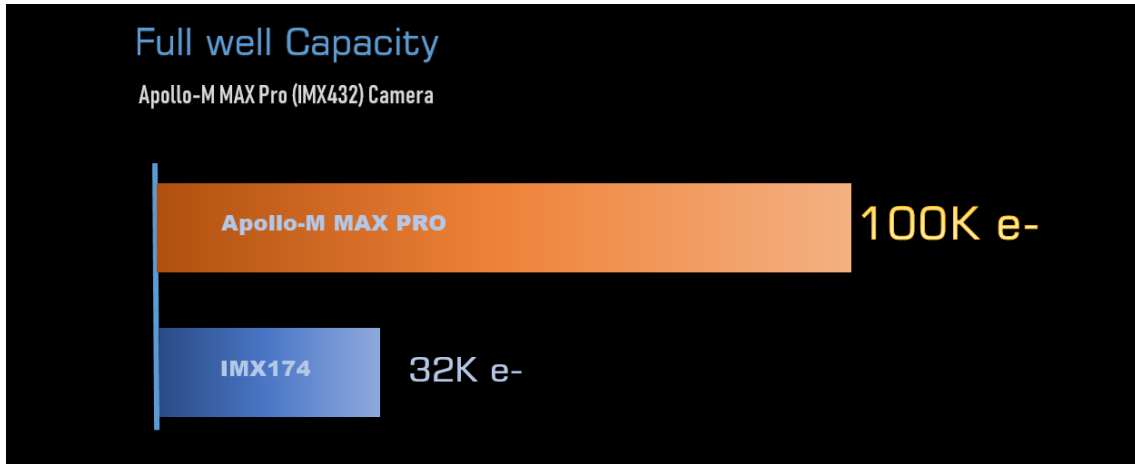

HCG and Noise

HCG mode will automatic open when Gain ≥ 145 , readout noise will drop to 4.6e. And dynamic range will rise to 12 drops again.

At 380 gain, readout noise of Apollo-M MAX (IMX432) camera is 2.6e, it is lower than IMX174. And full well will still bigger than IMX174.

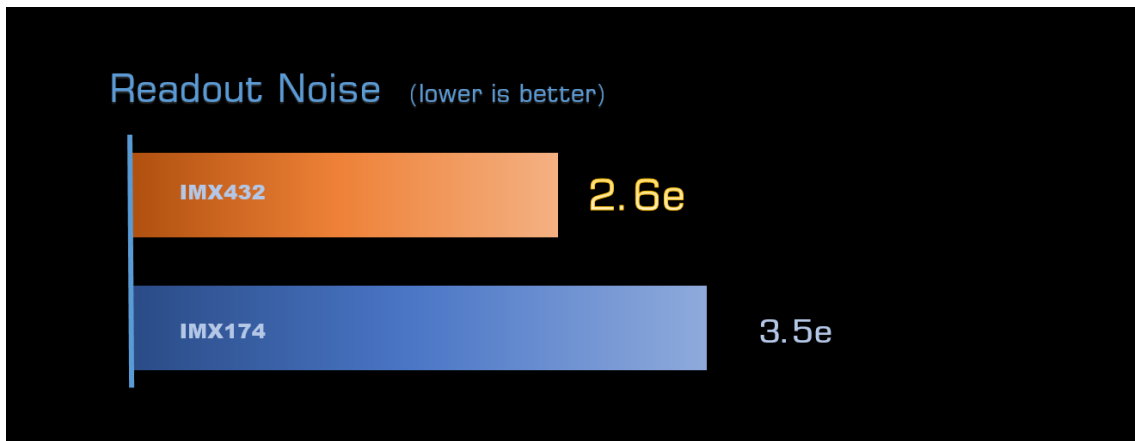


Amp-Glow performance

Apollo-M MAX Pro is not a non-amp-glow camera, but its amp-glow is very smooth, we believe it will be easier to be calibrated. In solar imaging, it won't be a problem at all.

300s@gain=0, offset=10, -10 degree, Dark frame of Apollo-M MAX Pro camera:

[DOWNLOAD](#)

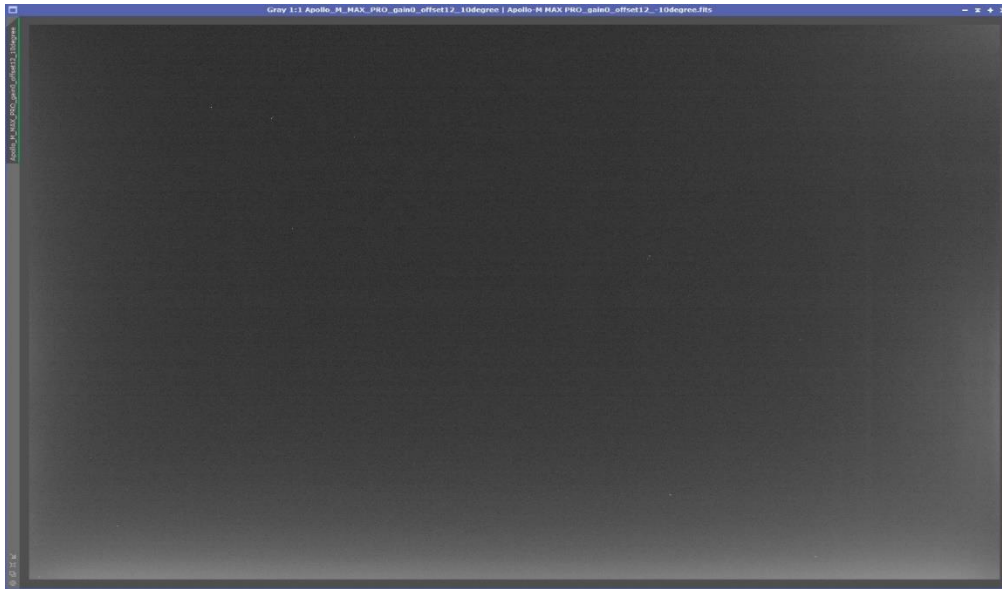


Preview of Dark frame: Exposure=300s, gain=0, offset=10, temp=-10°C STF auto-Stretch in Pixinsight 1.86

512MB DDR3 Cache


As an improvement, DDR3 cache in cooled cameras are increased to 512MB. It helps stabilize and secure data transmission, it effectively avoids frame dropping and greatly reduces readout noise.

With the DDR3 cache, the camera does not have high demands on computing needs any longer, it will still have excellent performance even if it is connected to a USB 2.0 port.

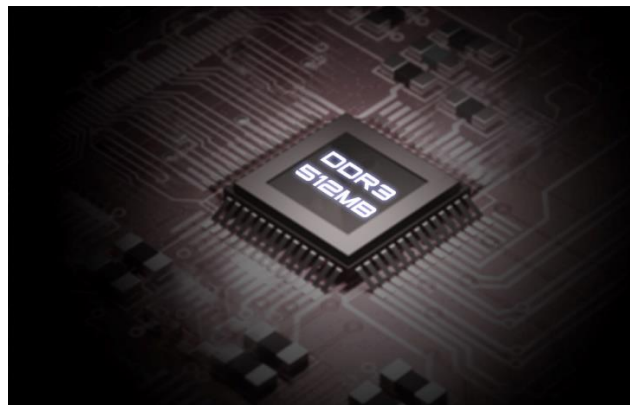

Type-C Data port and Power port

Back piece of cooled camera has 2 Type-C data port and 12V DC 5.5×2.1mm power port.

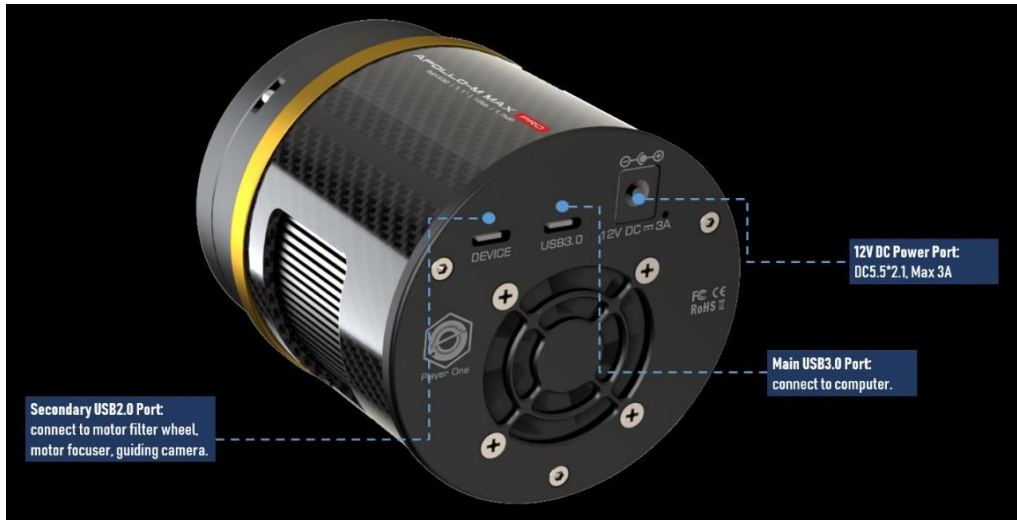


Main data port support USB3.0 protocol, the camera can run 126fps under RAW8 mode. Type-C port is easier to plug in when assemble the imaging equipment in night.

When recording images, since the actual writing speed will be affected by the writing speed of the hard disk itself, when the hard disk writing speed is slow, the recording may not reach the theoretical speed. It is recommended that you use a high-quality solid state drive to record data to give full play to the performance of the camera.

The camera has 12V DC5.5*2.1mm port to provide enough power to TEC cooling system. If you don't need to power up cooling, only need to connect the main Type-C port, the camera will work as an uncooled camera.

Standard Cable Usage

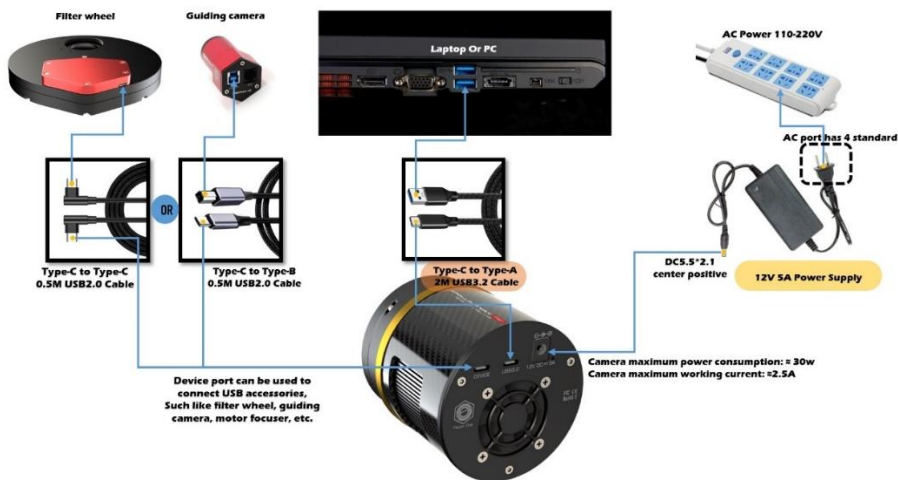

Cooling System and Anti-Dew Heater

In ASCOM window, we provide 3 adjustable parameters: Target temperature, Fan Speed and Anti-Dew power.


Standard Delta-T : 35°C-40°C(Long exposure mode) , 30°C(Video mode) ,

when **ambient temp 30°C, fan speed 100%, dew heater 1%.**

Recommend Delta-T settings: 30°C-35°C below ambient, fan speed 50-70%, dew heater 10%, power consumption 40- 60%.

The rotation speed of cooling fan is also adjustable; the **default value is 50%** speed.

Dew problem is the biggest enemy in astro imaging, the camera integrated anti-dew heater in front of the camera. The heat power is adjustable.

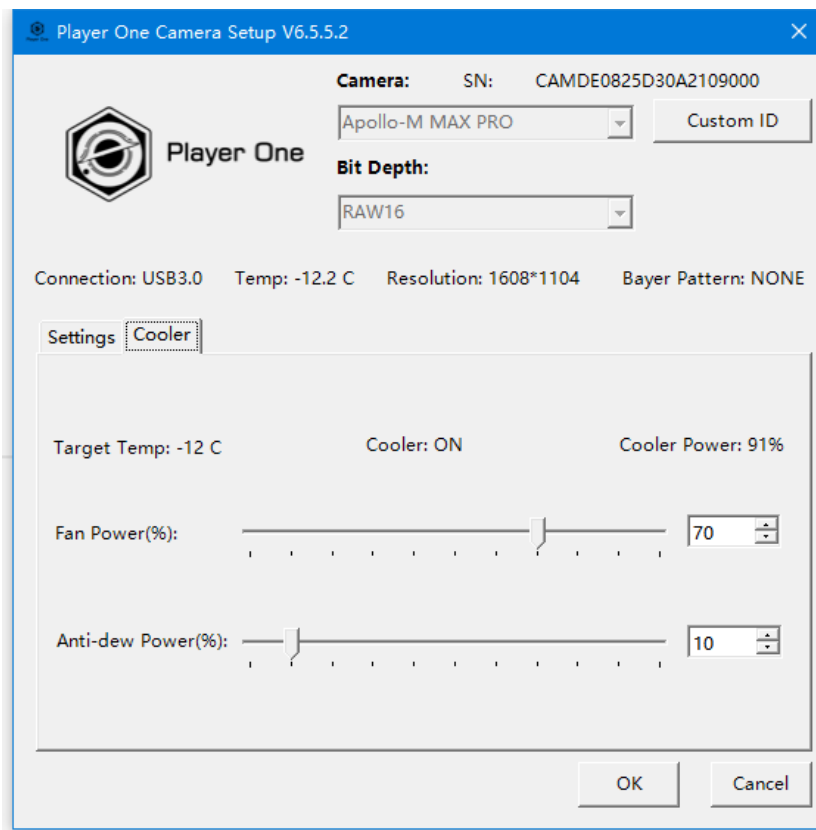


Overvoltage and overcurrent protection mechanism

Player One cameras produced by the number one player ensures the safety of your camera and other equipment through overvoltage and overcurrent protection mechanisms.

Performance

HCG open at gain=145.

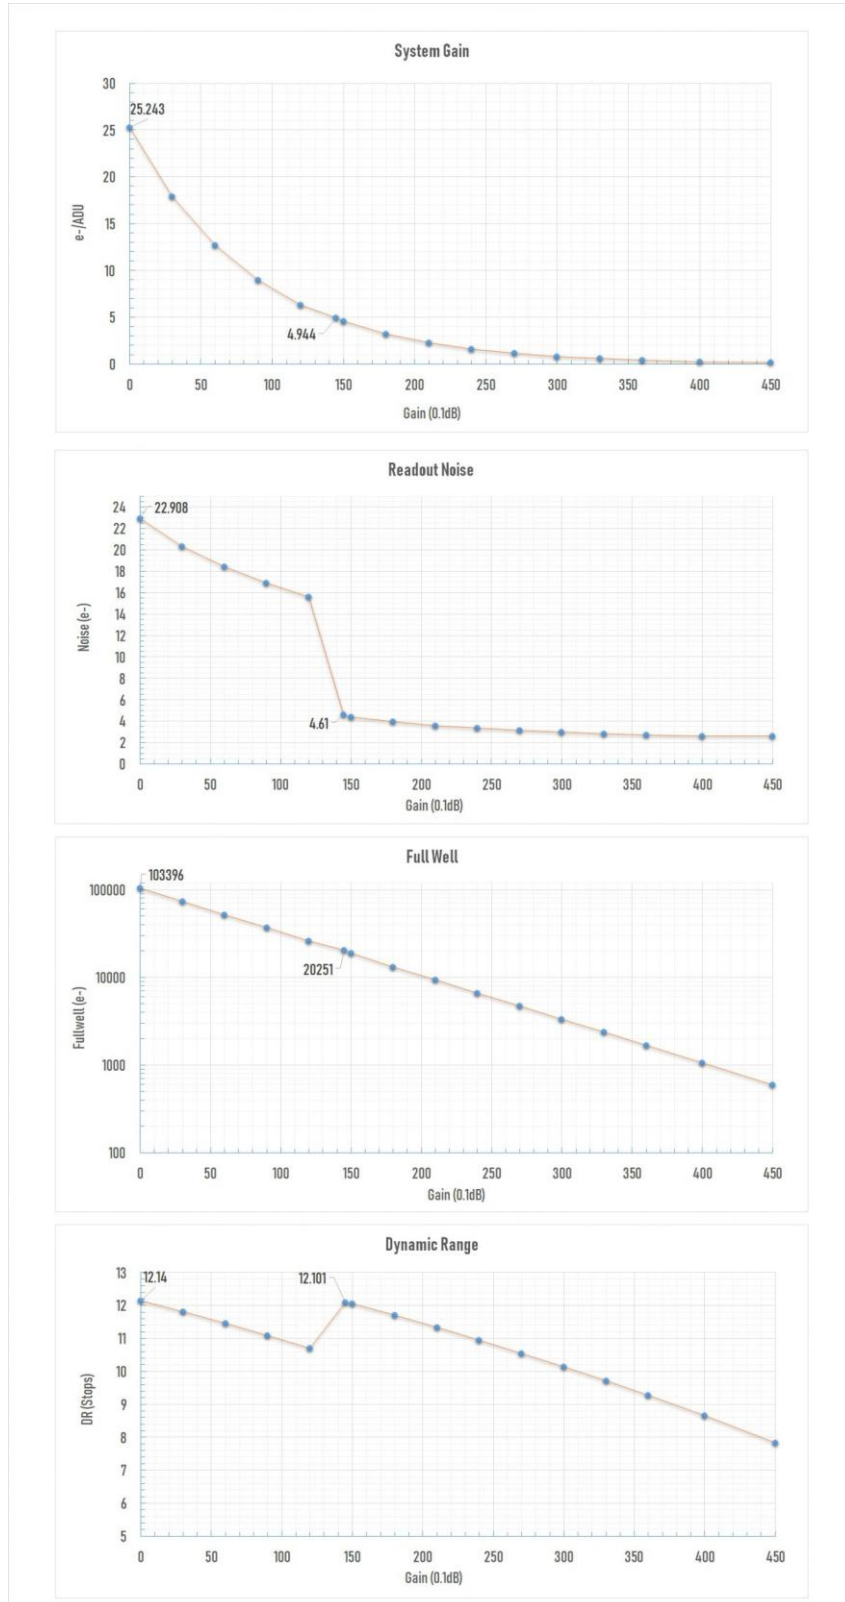

Readout Noise


Regarding readout noise, we solemnly promise that all values are obtained from actual tests. And for users, you could use Sharpcap 4 for testing. SC4 has a function called **Sensor Analysis**, provide a very simple way to test readout noise.

We wrote a tutorial on our website: <https://player-one-astronomy.com/service/manuals/>

If you are interested in readout noise testing, you may try it yourself, which is very simple.


Dark current

The dark current is 0.3e/s/pix at -20°C, and 0.39e/s/pix at 0°C.

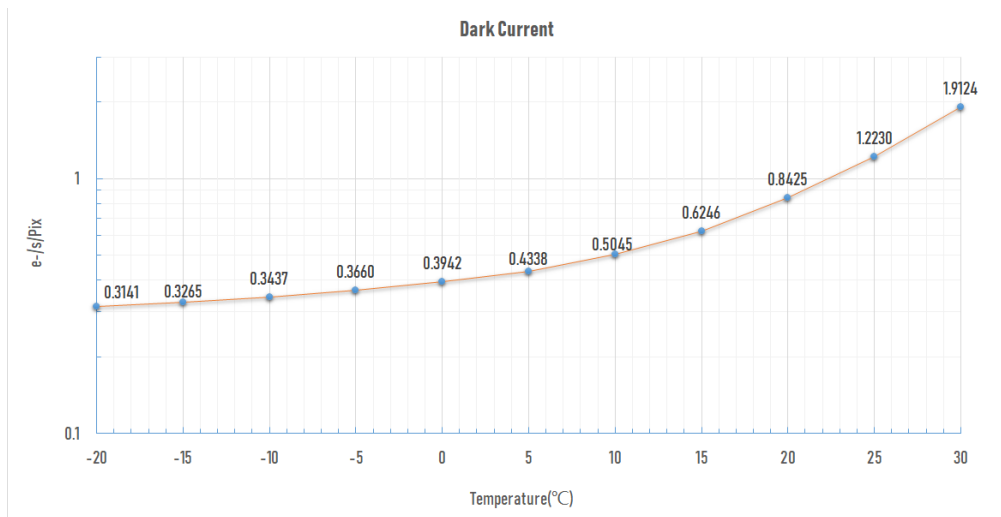


Relative QE Curve

IMX432 QE Curve

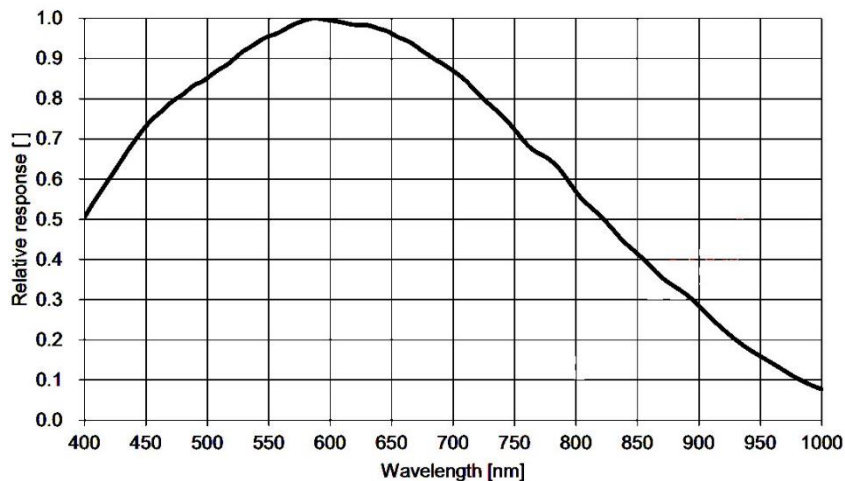


Mechanical Drawing

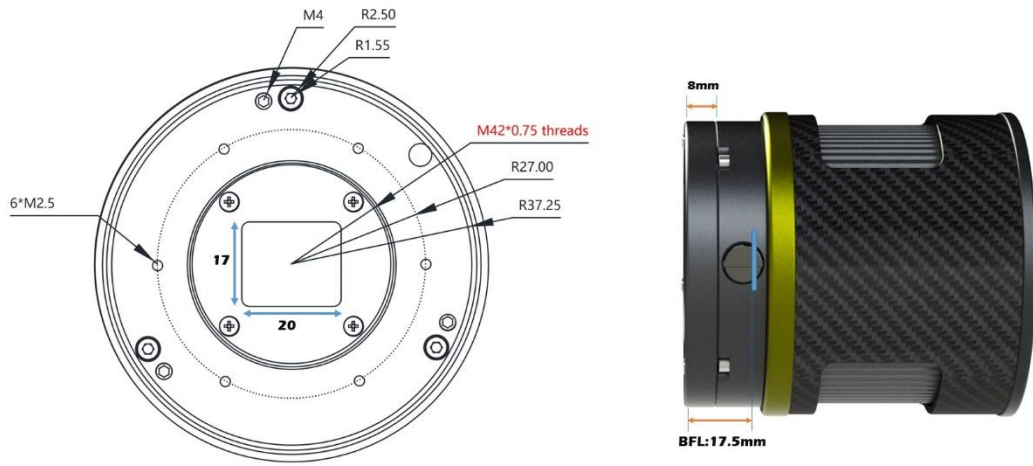


BFL Solutions

Following is some recommend 55mm BFL solution for this camera. If don't consider about BFL, the connection way is various.

Apollo-M MAX PRO camera Basic BFL solution

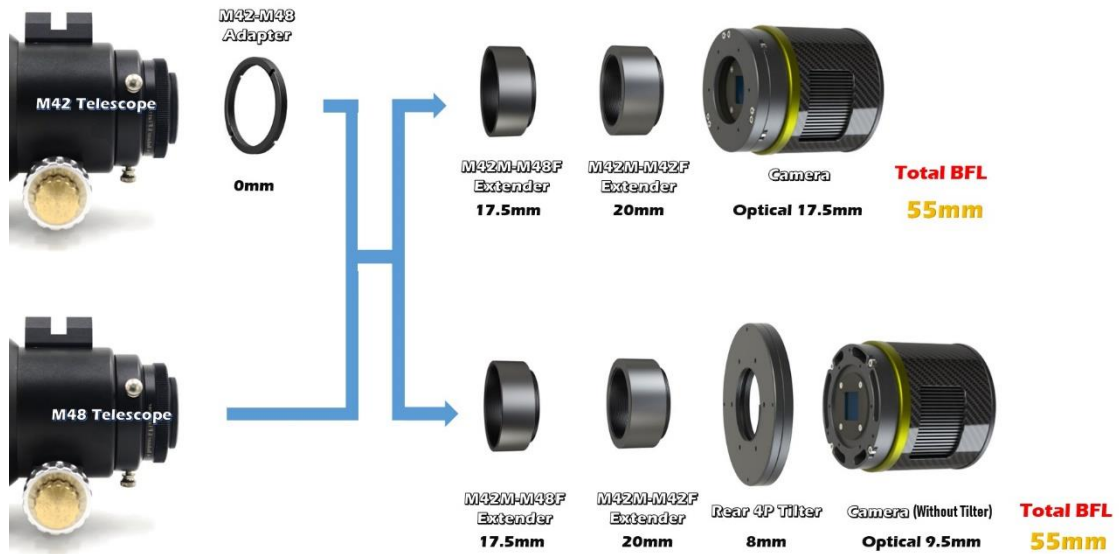

Apollo-M MAX PRO camera + Phoenix Wheel 8X1.25 BFL solution

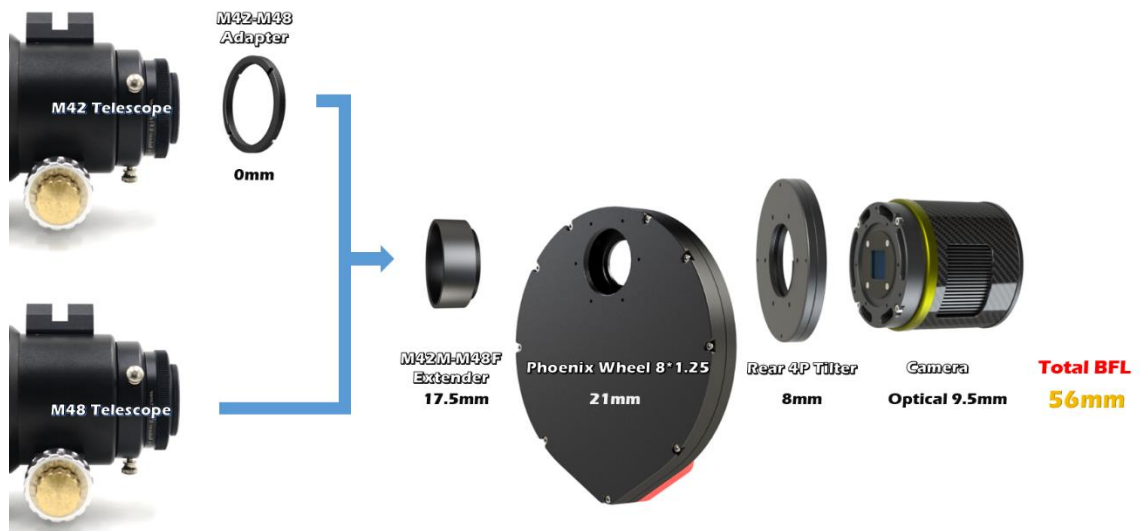

Apollo-M MAX PRO camera + Phoenix Wheel 8X1.25 + FHD-OAG MINI BFL solution















Notice: Some BFL solution is 56mm (Compensate light path differences which caused by filters)

Package List



Camera package

<p>1</p>  <p>Camera + Metal Cover</p>	<p>2</p>  <p>M48F-M42M Extender 17.5mm</p>	<p>3</p>  <p>M42F-M42M Extender 20mm</p>	<p>4</p>  <p>M48M-M42F Adapter 0mm</p>
<p>5</p>  <p>T-mount and 1.25" Cover</p>	<p>6</p>  <p>Air Blower</p>	<p>7</p>  <p>Type-C to Type-A 2M USB3.2 Cable</p>	<p>8</p>  <p>Type-C to Type-C 0.5M USB2.0 Cable</p>
<p>9</p>  <p>Type-C to Type-B 0.5M USB2.0 Cable</p>	<p>10</p>  <p>Screwdriver×1 M2 Hexagonal Wrench×1 A bag of M2.5 screw</p>	<p>11</p>  <p>Rear 4P tilter</p>	<p>12</p>  <p>Camera Bag Cable Tie</p>

Warranty & Shipping Policy

Payment method

We provide *PayPal* and *PayPal checkout* on our website.

Shipping and Delivery

Shipping Fee:

- Amount \geq 299USD: free express shipping
- Amount $<$ 299USD: 29.9USD for express shipping

Shipping Services:

- We usually use DHL, UPS, FedEx, TNT for shipping.
- Make sure your email is correct, we maybe will contact with you through emails in case of emergency.

If customer wants to designate a shipping company or has special requirement, please send an email to support@player-one-astronomy.com and tell us your detailed requirement.

Shipping time:

- Usually 7-14 days.
- Tracking number will be updated in 3 days after paid.

For orders from areas where transportation is not easy, such as islands, town in mountainous regions, delivery time will be slightly longer.

Please send an email to support@player-one-astronomy.com immediately, if the following occurs:

- Shipping delayed or has some abnormal information.
- The packing is badly damaged on arrival, take pictures and do not sign.

Tax

- The price on our website without tax.
- Please note that buyers are liable to charge tax involved, such as Import tax, VAT, customs handling fee, etc.
- Those fees possibly will be collected at the time of delivery by courier.

For best experiences, we recommend customers to purchase our products form local dealers.

After-sales Service

Warranty Policy

2-year free warranty (time start from delivered) for Player One products. If the product has any issue, please send the image or video and description to support@player-one-astronomy.com for further check to confirm.

- Purchase from Player One official online store, we will provide warranty service directly.
- Purchase form dealer, we will provide warranty service through dealer.

Repair in warranty, customer only pay the shipping fee of shipping back the product to us or dealer, and no other extra fees.

Replacement Policy

You can request our Replacement Service:

- √ Within 30 calendar days of receiving the product if the product does not match the original description of the product in one or more significant respects.
- √ Within 30 calendar days of receiving the product if the product suffers performance failure.

Please contact our After-Sales team by email to support@player-one-astronomy.com within 30 calendar days of receiving the products. Player One shall be responsible for the two-way replacement freight for any products sent in for replacement due to performance faults.

Warranty and Replacement Policy Exceptions:

- × Warranty service time or replacement service time expired.
- × Legal proof-of-purchase, receipts, or invoices are not provided, or are reasonably believed to have been forged or tampered with.
- × A product sent to Player One for replacement does not include all original accessories, attachments and packaging, or contains items damaged by user error.
- × A product is found to have no defects after all appropriate tests are conducted by Player One.
- × Any fault or damage of the product is caused by unauthorized use or modification of the product, including exposure to moisture, entry of foreign bodies (water, oil, sand, etc.) or improper installation or operation.
- × Product labels or serial numbers show signs of tampering or alteration.
- × Damage is caused by uncontrollable external factors, including falling down, fires, floods, or lightning strikes, etc.
- × Proof of damage during transit issued by the carrier cannot be provided.
- × Other circumstances stated in this policy.

In those situations, repair the product might have extra cost, we will estimate cost and email customer to know the information before send product back.