



Player One

Poseidon-C Pro Camera Manual

V1.0

Dec, 2024

Table of Contents

Product Features	3
Technical parameters	4
Product Description.....	4
New Cutting-edge Design	5
Rear Adjustment 4 Point Sensor Tilt Plate	6
Deep Cooling.....	7
512MB DDR3 Cache.....	8
STARVIS Technology	8
APS-C Format.....	9
Native 16bit ADC.....	9
Non-Amp-Glow.....	10
Type-C Data port and Power port	10
Standard Cable Usage.....	11
Cooling System and Anti-Dew Heater	12
Performance	13
Dual Sampling Mode	13
Frame rate.....	16
Full well	16
Readout Noise	16
Dark Current	16
QE Curve.....	17
Mechanical Drawing	18
BFL Solutions	19
Package List.....	22
Warranty & Shipping Policy.....	23

Product Features

DSO cooled camera line is the most advanced product line in Player One history. We start the project from 2021, through a lot of modify and rebuild we made this final version. It brings our newest technology and design to everyone, we are very proud to introduce this camera line.



Sony IMX571 Mono / Color
Non-Amp-Glow Back-illuminated Sensor

- APS-C**
26 Mega Pixels
- 16bit**
ADC bit depth
- 15FPS**
6252 x 4176
- 91%/80%**
Mono/Color QE Peak
- 1e**
Readout Noise
- 71.7Ke**
Full Well
- Rear 4P**
Sensor Tilt Plate
- 512MB**
DDR3 buffer
- Anti Dew**
Adjustable Dew Heater
- Delta-T 40°C**
Deep Cooling
- Type-C**
USB3.0 port
- BFL Solution**
Complete Imaging Train Solutions

Technical parameters

Sensor	New SONY IMX571 APS-C CMOS (color)
Diagonal	28.3mm
Total Pixels	26 Mega Pixels
Max Resolution	6252×4176
Pixel Size	3.76μm
Bayer Matrix	RGGB
Chip Size	23.5mm×15.7mm
Frame Rate	10FPS (10bit)
Shutter	Rolling shutter
Exposure Range	32μs-2000s
Readout Noise	3.9-1.0e
Full Well	71.7k e
QE Peak	≈80%
ADC	16 bit
Cooling System	High quality 2 stage TEC cooling Component
Cooler Power Consumption	12V – 3A Max
Delta T	40°C ± 2°C (below ambient)
Working Temperature and Humidity	Working Temperature: -10°C—60°C Working Relative Humidity: 0%—80%
Protective Window	D46*2MM High Quality AR Plus (Anti Reflection) Multi-Layer Coating
Data Port	Type-C USB3.0/USB2.0
Adapter	M48X0.75, 2", 1.25"
Back Focal Length	17.5mm, 12.5mm(without sensor tilt plate)
Diameter	90mm
Weight	650g
Resolution and FPS	Under USB3.0 mode Resolution 10bit ADC 16bit ADC 6252×4176 15FPS 7FPS More resolution options could be setup in capture software!

Product Description




New Cutting-edge Design

Polygon like regular hexagon is very Player One, the DSO cooled cameras we want to make it more beautiful and practical. After a lot of trying, we fix the final style, which uses a scientific and technological octagon to construct the main body line and 4 sides are cambered surface, supplemented by round chamfers to achieve both rigidity and flexibility. The front piece is round to avoid diffraction on RASA. The positive red, which is like a summer fire, is matched with the low-key and steady black, and the super-fine frosting process on the entire surface makes the camera look luxurious and cool, and keep Player One style.



Poseidon-C Pro (IMX571) cooled camera is developed by Player One Astronomy, it's design for advanced DSO imaging. it adopts **Sony IMX571 APS-C format** color sensor.

The **3.76um pixel size** accommodates a well depth of **71.7Ke** with a total of **26MP** (the resolution is 6252*4176), and the diagonal is **28.3mm**.

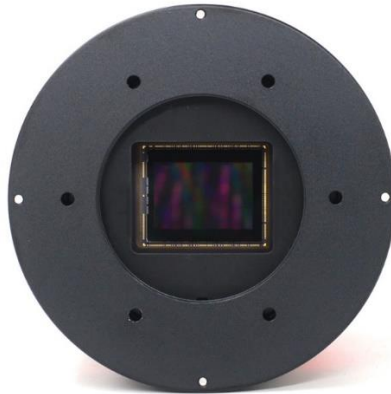


Rear Adjustment 4 Point Sensor Tilt Plate


When taking deepsky objects, using sensor tilt plate can get a much smaller field curvature of the telescope. We adopt rear Adjustment and 4 point tilt plate, it has a lot advantages in usage.



4 Point adjustment is easier to know which corner is needed to adjust. The built-in high-density sponge shading pad can block the light from the side slits without any side leakage.

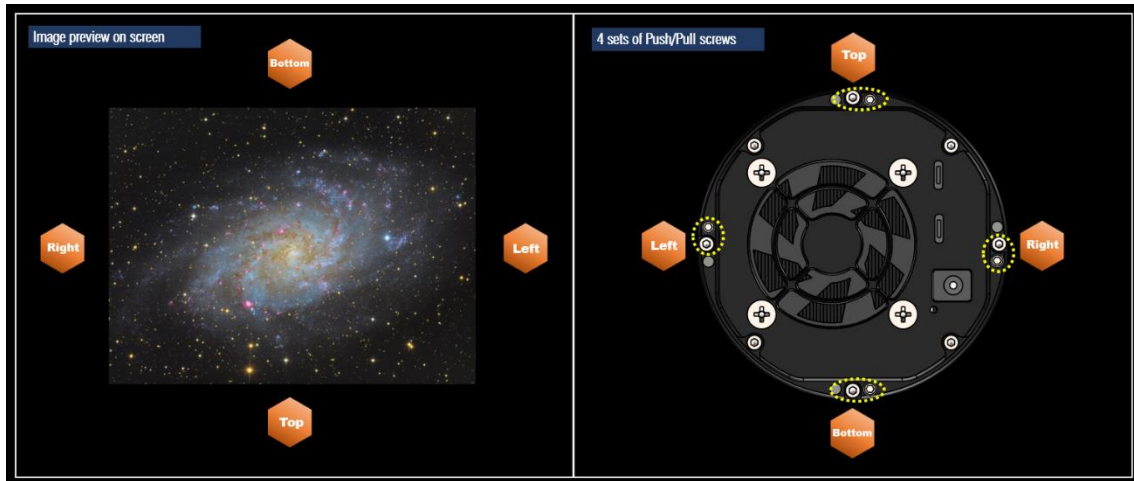


For understand 4 point adjustment method, we made an example for users:

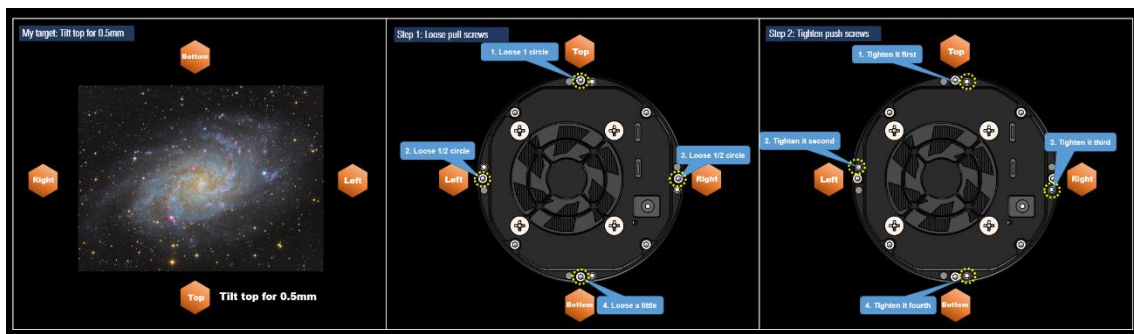

Deep Cooling

Player One cooled camera series use 2 Stage TEC Cooling unit, after improved the structure design to reject the heat back to camera chamber, Camera **Delta-T** can reach over **40°C**.




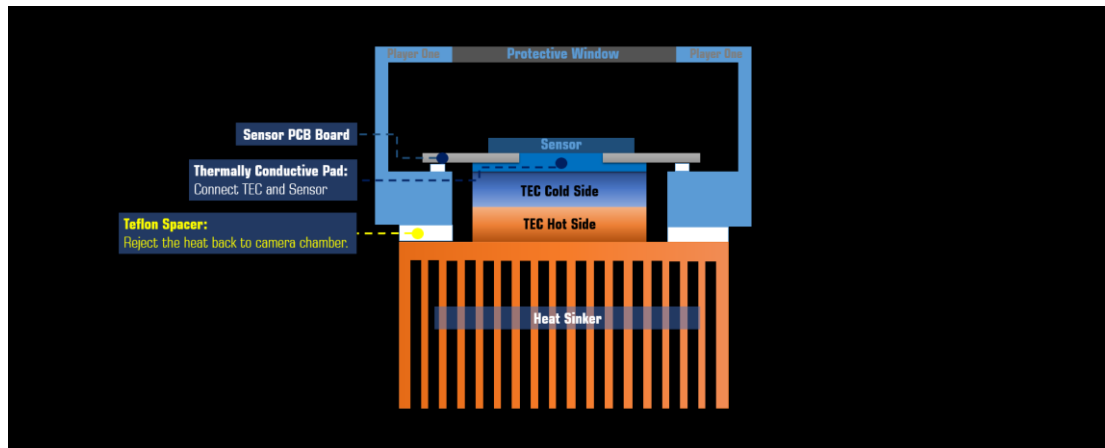

512MB DDR3 Cache

As an improvement, DDR3 cache in cooled cameras are increased to 512MB. It helps stabilize and secure data transmission, it effectively avoids frame dropping and greatly reduces readout noise.

With the DDR3 cache, the camera does not have high demands on computing needs any longer, it will still have excellent performance even if it is connected to a USB 2.0 port.

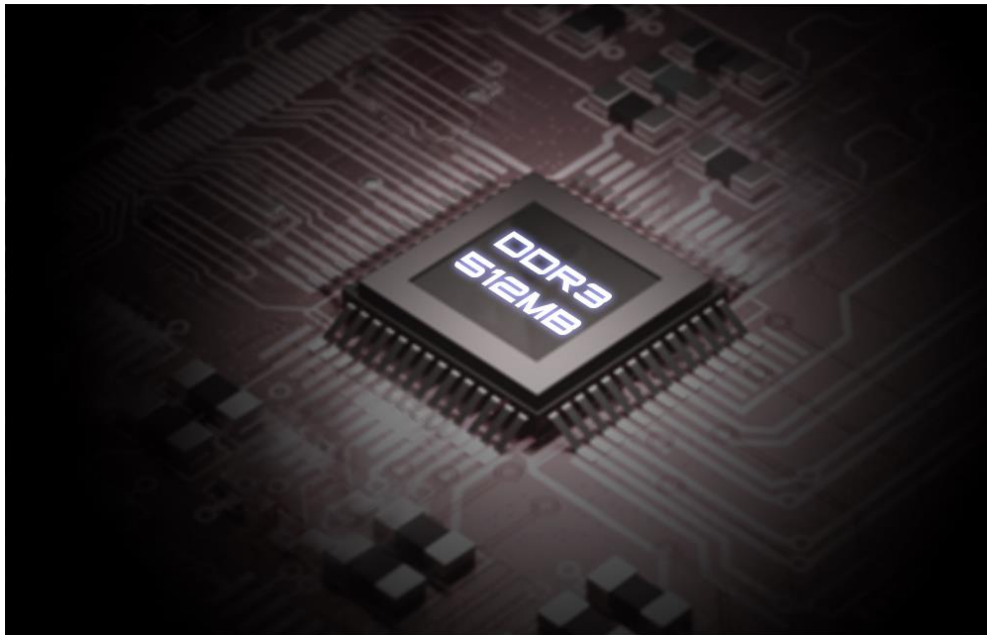


STARVIS Technology

Poseidon-C Pro (IMX571) cooled camera based on **Sony STARVIS technology**, it is back-illuminated pixel technology used in CMOS image sensors.


APS-C Format

Poseidon-C Pro cooled camera has APS-C format (23.5mm*15.7mm), this size is quite big for DSO imaging.

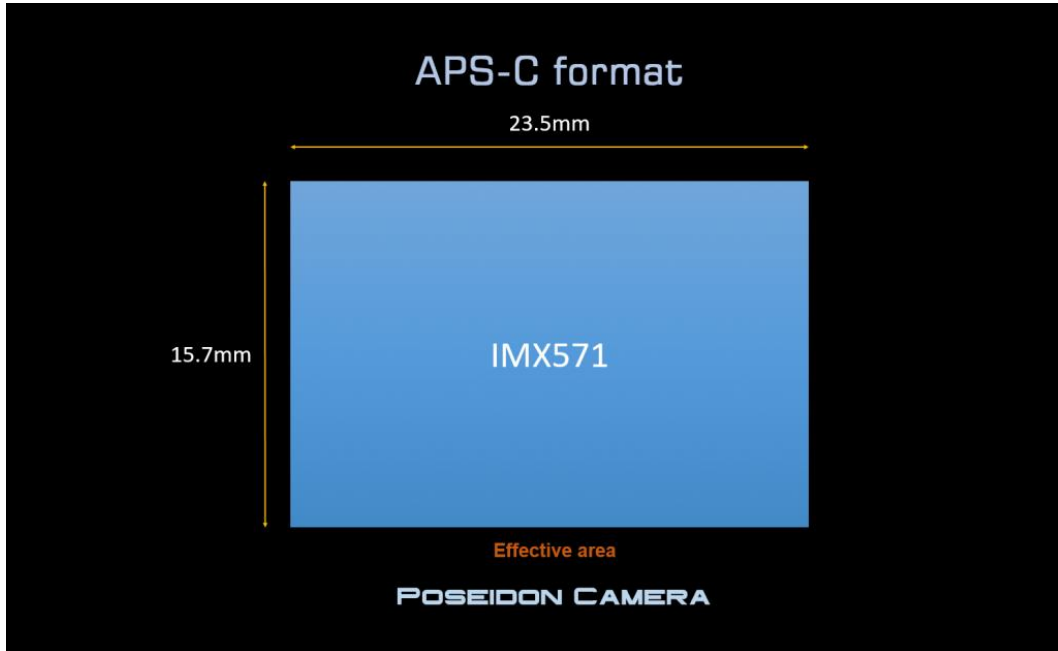

Native 16bit ADC

IMX571 sensor has native 16-bit on-chip ADC. Native 16bit ADC (**65536 levels**) provide higher sample resolution than 12bit (4096 levels) or 14bit (16384 levels). When we do non-linear transformation, 16bit data can endure very strong transform and also could bring much better light and dark transition, furthermore 16bit can make the color more vivid.

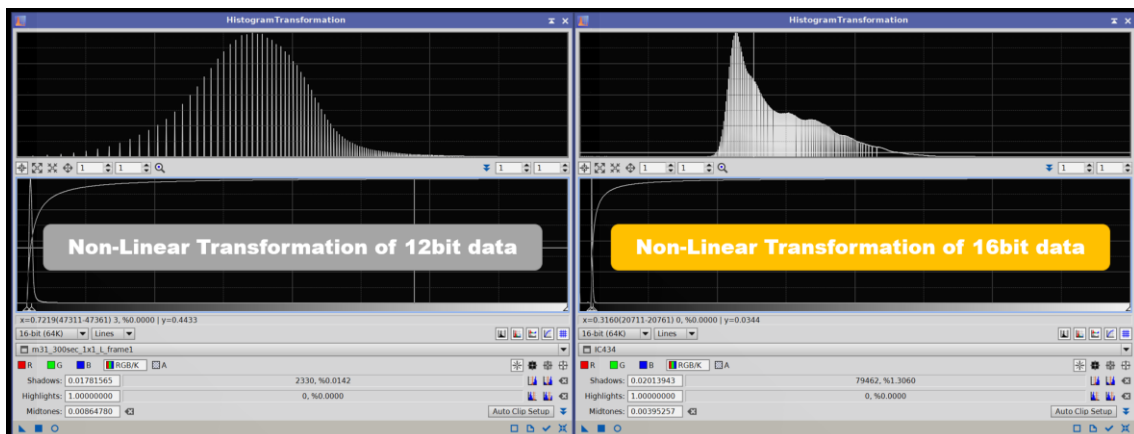


Non-Amp-Glow

Poseidon-C Pro cooled camera is a Non-Amp-Glow camera too!

300s, gain=0, offset=10, dark frame at -20°C of Poseidon-C Pro cooled camera:

[DOWNLOAD](#)

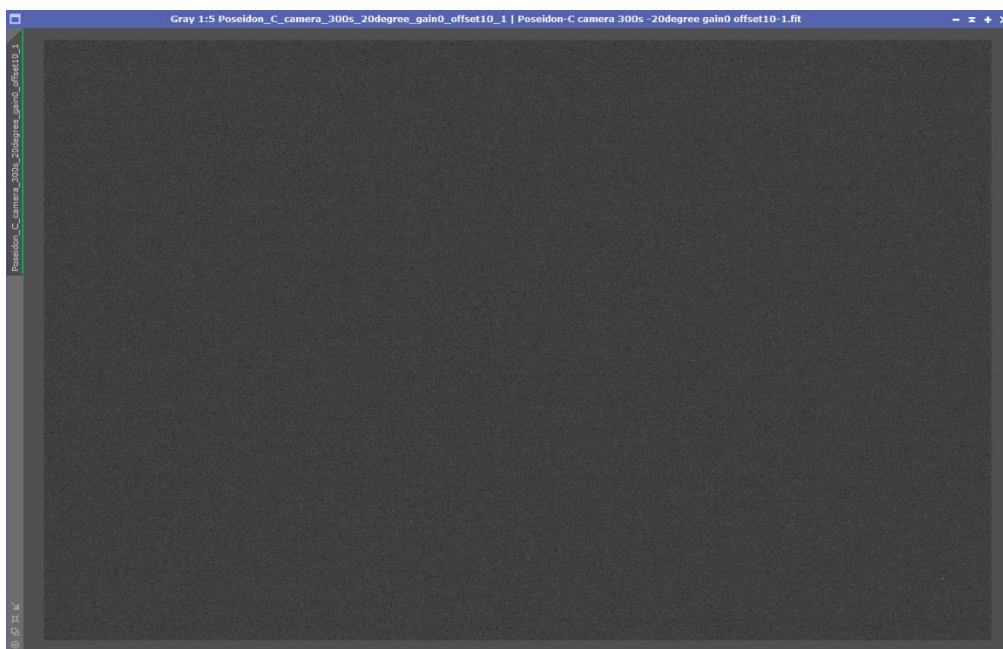

Preview of Dark frame: Exposure=300s, gain=0, offset=10, temp=-20°C STF auto-Stretch in Pixinsight 1.86

Non-Amp-Glow can give us very clean background, much easier to get high quality images.

Type-C Data port and Power port

Back piece of cooled camera has 2 Type-C data port and 12V DC 5.5x2.1mm power port.



Main data port support USB3.0 protocol, the camera can run 15fps under RAW8 mode. Type-C port is easier to plug in when assemble the imaging equipment in night.

When recording images, since the actual writing speed will be affected by the writing speed of the hard disk itself, when the hard disk writing speed is slow, the recording may not reach the theoretical speed. It is recommended that you use a high-quality solid state drive to record data to give full play to the performance of the camera.

The camera has 12V DC5.5*2.1mm port to provide enough power to TEC cooling system. If you don't need to power up cooling, only need to connect the main Type-C port, the camera will work as an uncooled camera.



Standard Cable Usage



Cooling System and Anti-Dew Heater


In ASCOM window, we provide 3 adjustable parameters: Target temperature, Fan Speed and Anti-Dew power.

Standard Delta-T: 40°C ($\pm 2^\circ\text{C}$), when **ambient temp 30°C**, **fan speed 100%**, **dew heater 10%**.

Recommend Delta-T settings: 35°C below ambient, **fan speed 70%**, **dew heater 10%**, **power consumption 40- 60%**.

The rotation speed of cooling fan is also adjustable; the **default value is 70%** speed.

Dew problem is the biggest enemy in astro imaging, the camera integrated anti-dew heater in front of the camera. The heat power is adjustable.

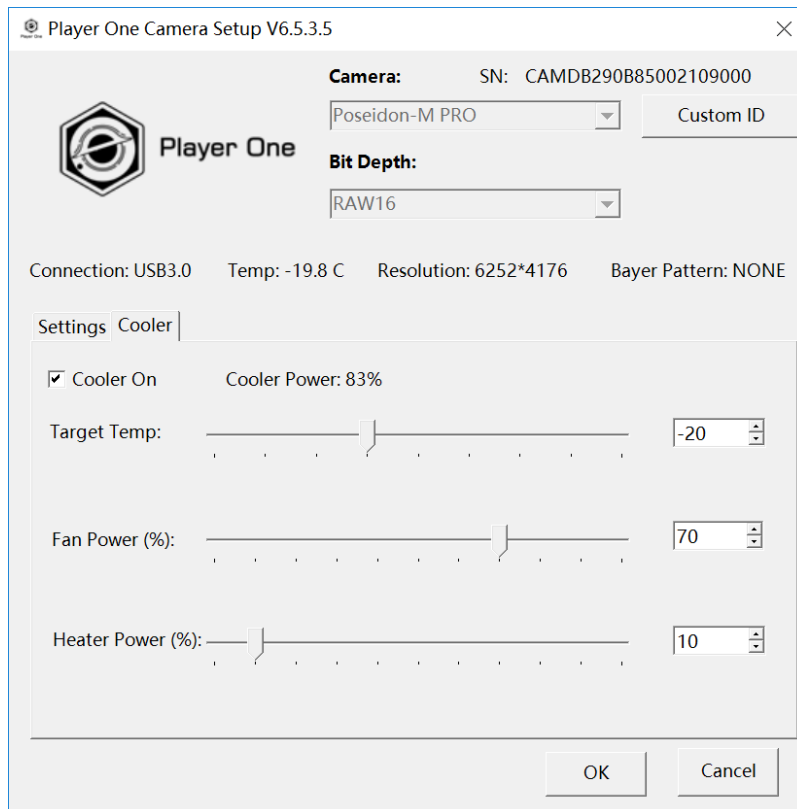


Overvoltage and overcurrent protection mechanism

Player One cameras produced by us ensures the safety of your camera and other equipment through overvoltage and overcurrent protection mechanisms.

Performance

Dual Sampling Mode

Poseidon series has dual sampling mode. **Normal** mode and **Low Noise** mode, they have different advantages in imaging.

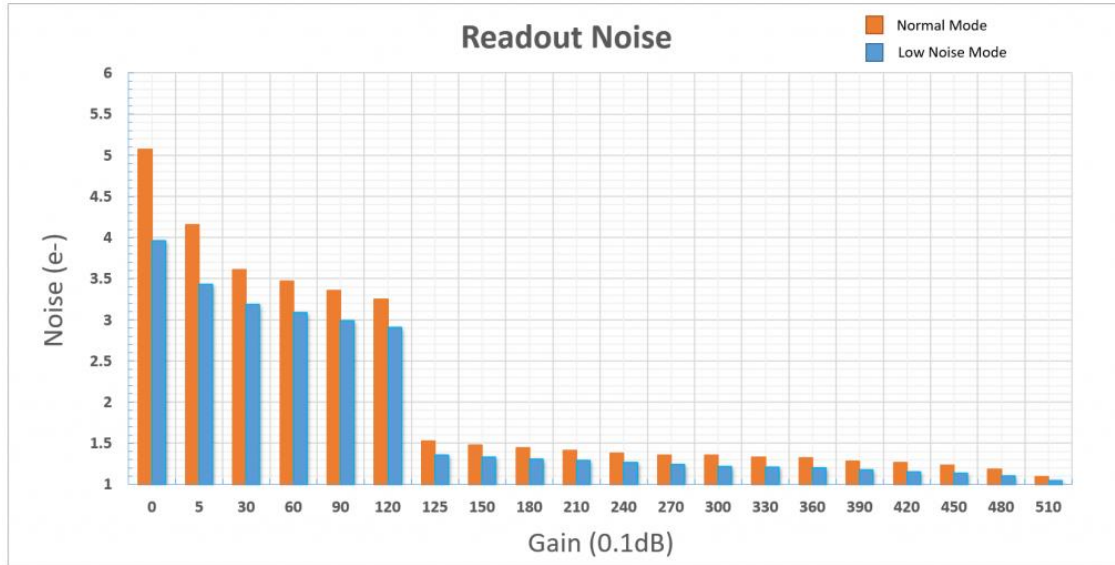


1. Normal mode has faster FPS, it is more suitable **for planetary imaging**.

2. Low Noise mode (LRN) mode has lower readout noise and higher dynamic range. it is more suitable **for DSO imaging**.





At gain=0, the camera has 14.26 stops dynamic range and 71.7Ke full well capacity, readout noise is 3.96e.

HCG open at gain=125, the camera has 13.58 stops dynamic range and 16.6Ke full well, readout noise drops to only 1.36e.

Low Noise mode

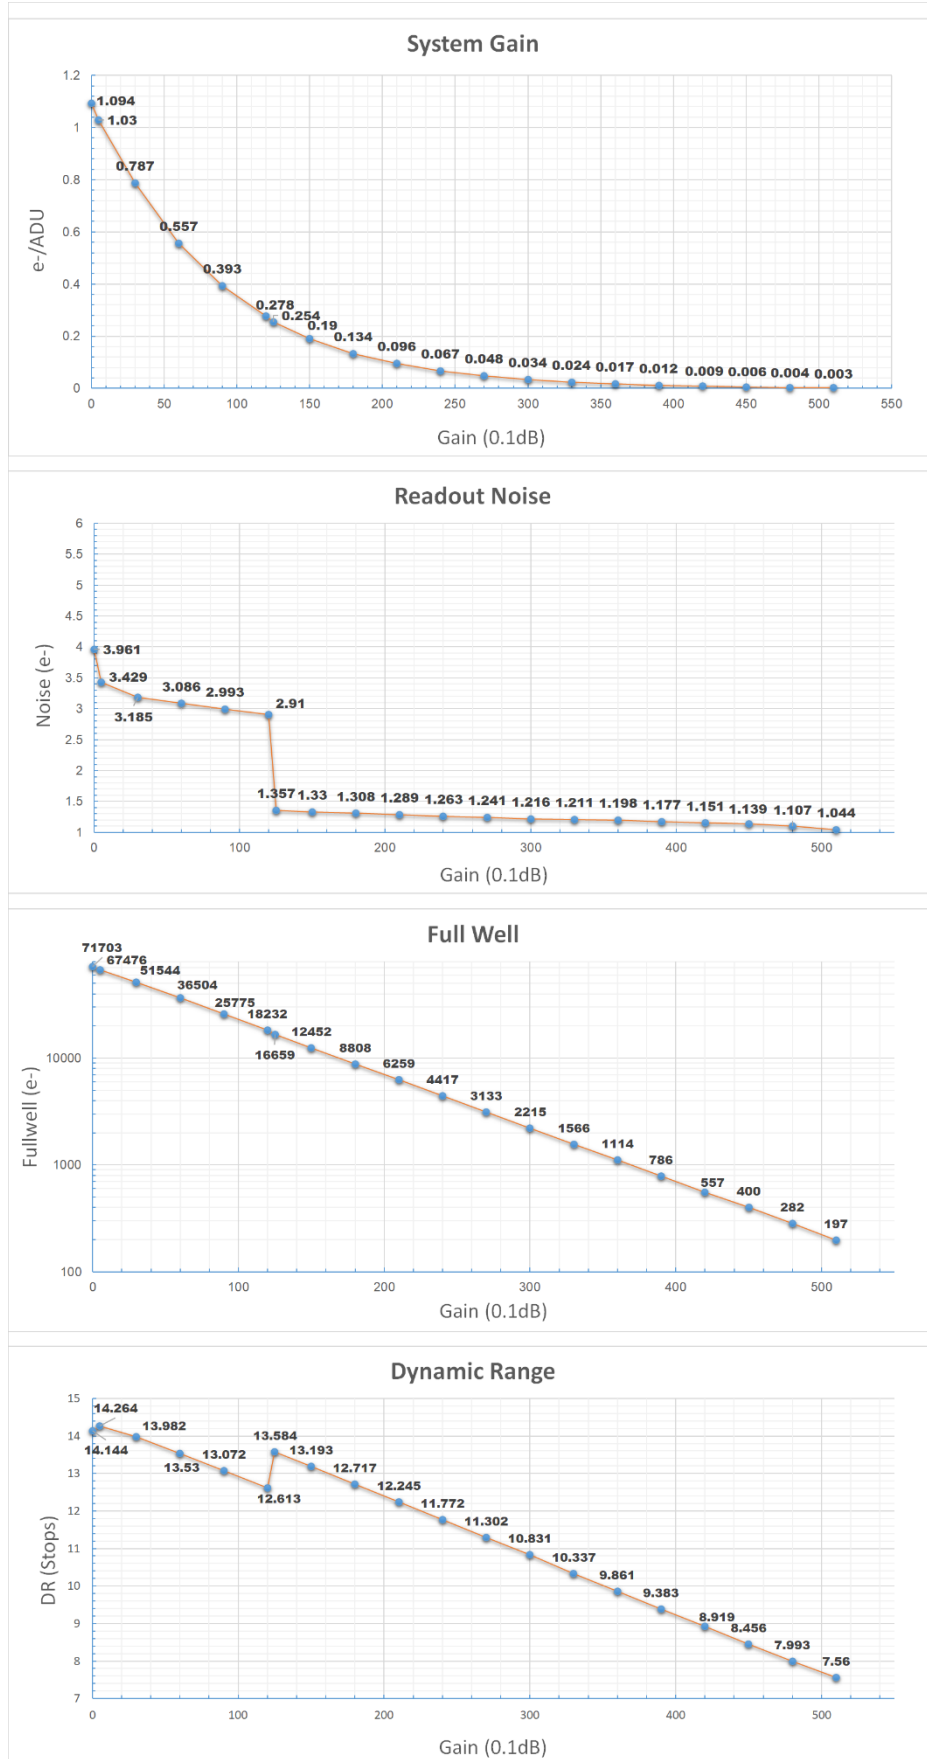

Normal model

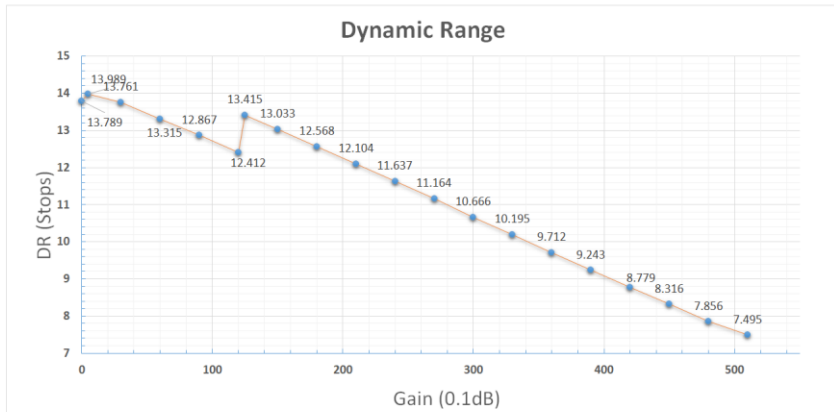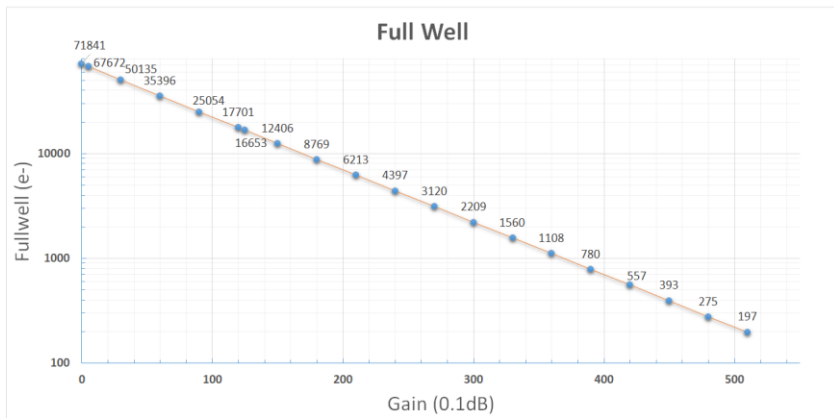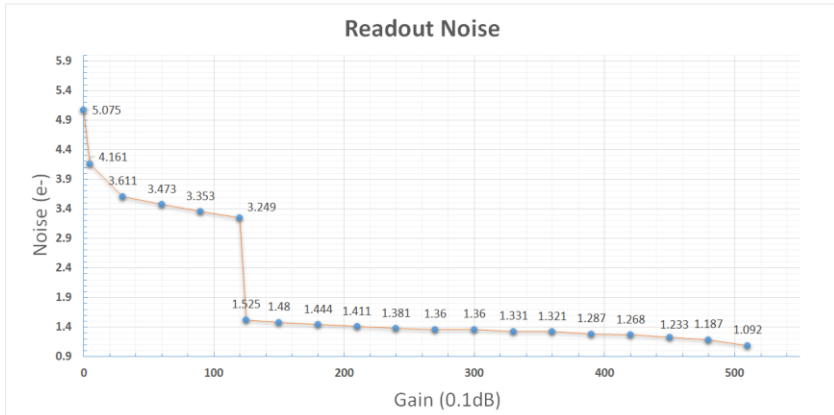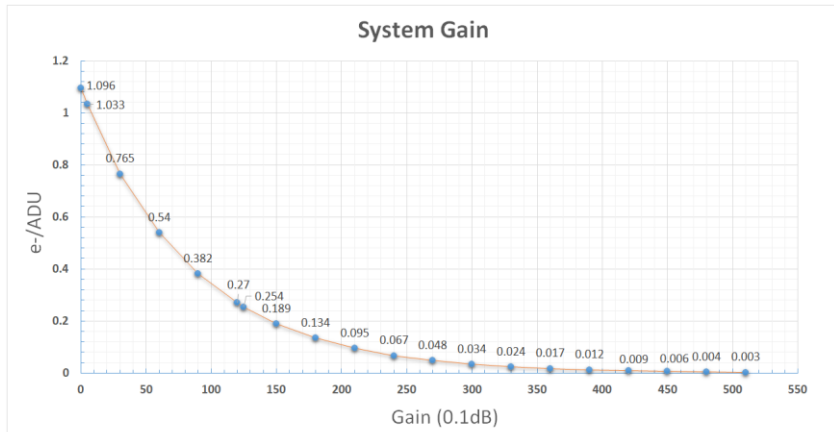


Frame rate

Poseidon-C Pro cooled camera can run 15FPS under RAW8 mode, that's much faster than existing models on market.

Full well

Poseidon-C Pro cooled camera has 71.7Ke full well, it's over 1.4 times than IMX571 Basic (50ke).

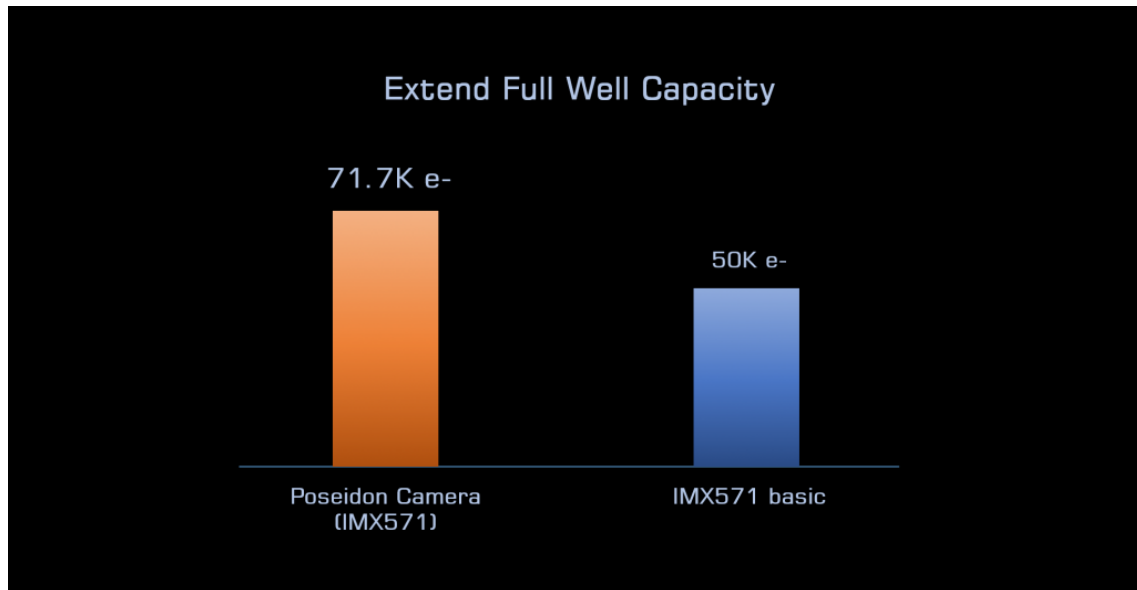

Readout Noise

Regarding readout noise, we solemnly promise that all values are obtained from actual tests. And for users, you could use Sharpcap 4 for testing. SC4 has a function called **Sensor Analysis**, provide a very simple way to test readout noise.


We wrote a tutorial on our website: <https://player-one-astronomy.com/service/manuals/>

If you are interested in readout noise testing, you may try it yourself, which is very simple.


Dark Current

The dark current is only 0.000105 e/s/pix at -20°C, and 0.001178e/s/pix at 0°C. In entire curve, dark current is almost like a straight a line, which can prove that Poseidon camera has very good quality.


Dark Current performance of Poseidon Camera

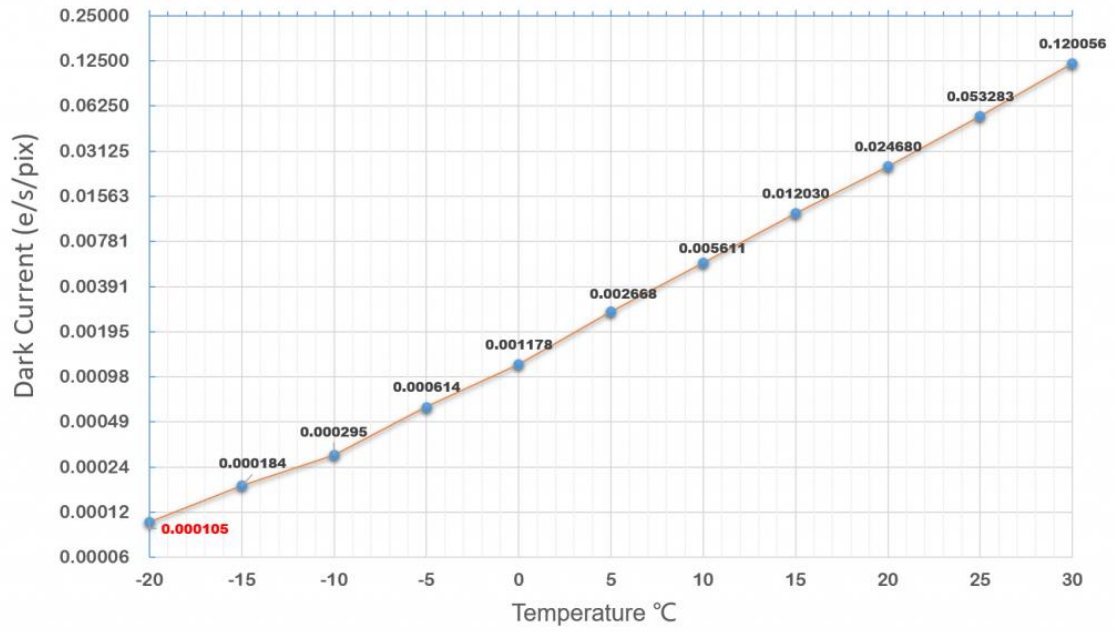

QE Curve

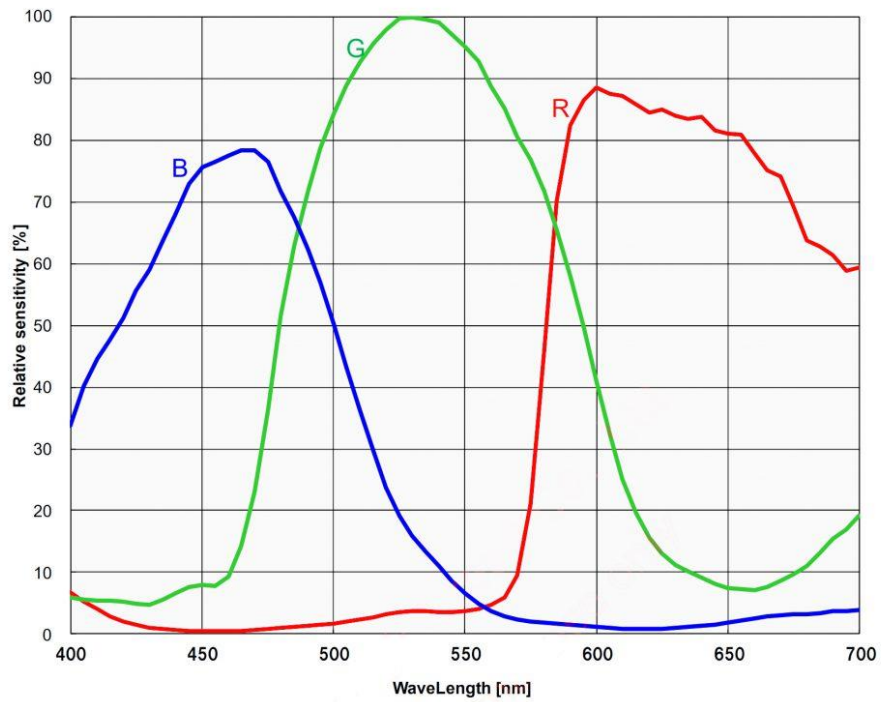


Mechanical Drawing

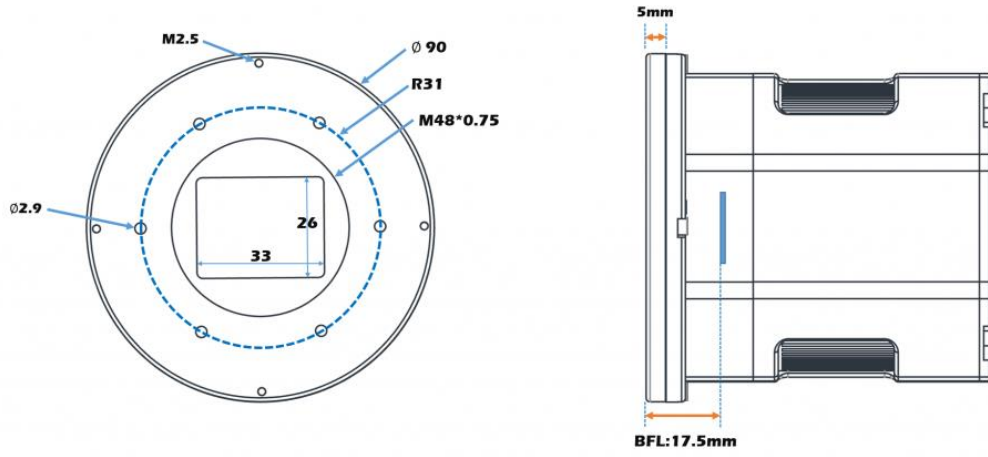


BFL Solutions

Poseidon-C PRO camera Basic BFL solution

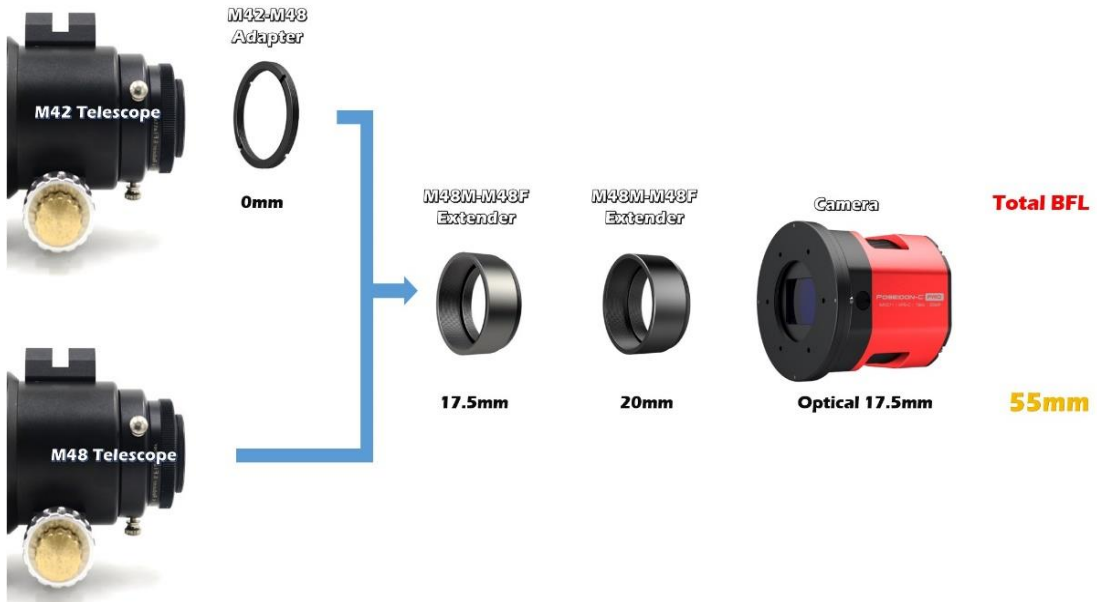

Poseidon-C PRO camera + Filter Drawer MAX BFL solution

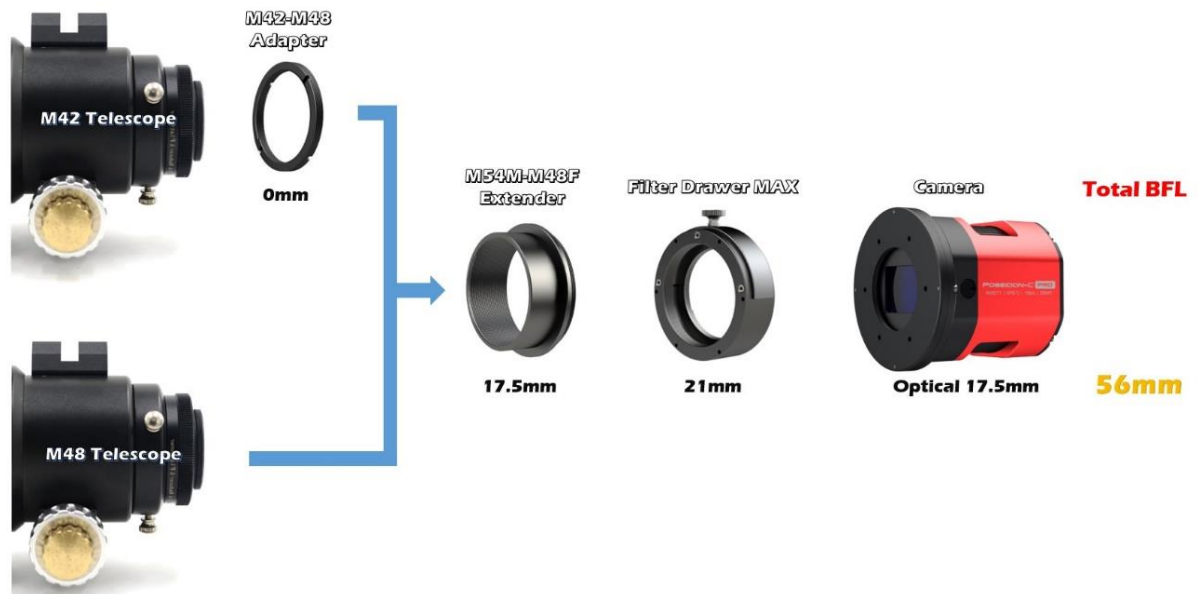

Poseidon-C PRO camera + Filter Drawer MAX + FHD-OAG MAX BFL solution



Notice: Some BFL solution is 56mm (Compensate light path differences which caused by filters)













Package List



Camera package

 <p>1</p>	 <p>2</p>	 <p>3</p>	 <p>4</p>
Camera+ Metal Cover	M48M-M48F Extender 17.5mm	M48M-M48F Extender 20mm	M48M-M42F Adapter 0mm
 <p>5</p>	 <p>6</p>	 <p>7</p>	 <p>8</p>
T-mount and 1.25" Cover	Air Blower	Type-C to Type-A 2M USB3.2 Cable	Type-C to Type-C 0.5M USB2.0 Cable
 <p>9</p>	 <p>10</p>	 <p>11</p>	 <p>12</p>
Type-C to Type-B 0.5M USB2.0 Cable	M2 Hexagonal Wrench×1 M2.5*5 screw×8	Cable Tie	Camera Bag

Warranty & Shipping Policy

Payment method

We provide *Paypal* and *Paypal checkout* on our website.

Shipping and Delivery

Shipping Fee:

- Amount \geq 299USD : free express shipping
- Amount $<$ 299USD : 29.9USD for express shipping

Shipping Services:

- We usually use DHL, UPS, FedEx, TNT for shipping.
- Make sure your email is correct, we maybe will contact with you through emails in case of emergency.

If customer wants to designate a shipping company or has special requirement, please send an email to *support@player-one-astronomy.com* and tell us your detailed requirement.

Shipping time:

- Usually 7-14 days.
- Tracking number will be updated in 3 days after paid.

For orders from areas where transportation is not easy, such as islands, town in mountainous regions, delivery time will be slightly longer.

Please send an email to *support@player-one-astronomy.com* immediately, if the following occurs:

- Shipping delayed or has some abnormal information.
- The packing is badly damaged on arrival, take pictures and do not sign.

Tax

- The price on our website without tax.
- Please note that buyers are liable to charge tax involved, such as Import tax, VAT, customs handling fee, etc.
- Those fees possibly will be collected at the time of delivery by courier.

For best experiences, we recommend customers to purchase our products form local dealers.

After-sales Service

Warranty Policy

2-year free warranty (time start from delivered) for Player One products. If the product has any issue, please send the image or video and description to *support@player-one-astronomy.com* for further check to confirm.

- Purchase from Player One official online store, we will provide warranty service directly.
- Purchase form dealer, we will provide warranty service through dealer.

Repair in warranty, customer only pay the shipping fee of shipping back the product to us or dealer, and no other extra fees.

Replacement Policy

You can request our Replacement Service:

- √ Within 30 calendar days of receiving the product if the product does not match the original description of the product in one or more significant respects.
- √ Within 30 calendar days of receiving the product if the product suffers performance failure.

Please contact our After-Sales team by email to support@player-one-astronomy.com within 30 calendar days of receiving the products. Player One shall be responsible for the two-way replacement freight for any products sent in for replacement due to performance faults.

Warranty and Replacement Policy Exceptions:

- × Warranty service time or replacement service time expired.
- × Legal proof-of-purchase, receipts, or invoices are not provided, or are reasonably believed to have been forged or tampered with.
- × A product sent to Player One for replacement does not include all original accessories, attachments and packaging, or contains items damaged by user error.
- × A product is found to have no defects after all appropriate tests are conducted by Player One.
- × Any fault or damage of the product is caused by unauthorized use or modification of the product, including exposure to moisture, entry of foreign bodies (water, oil, sand, etc.) or improper installation or operation.
- × Product labels or serial numbers show signs of tampering or alteration.
- × Damage is caused by uncontrollable external factors, including falling down, fires, floods, or lightning strikes, etc.
- × Proof of damage during transit issued by the carrier cannot be provided.
- × Other circumstances stated in this policy.

In those situations, repair the product might have extra cost, we will estimate cost and email customer to know the information before send product back.